



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04Q 3/00	A1	(11) International Publication Number: WO 98/42148 (43) International Publication Date: 24 September 1998 (24.09.98)
(21) International Application Number: PCT/FI98/00198 (22) International Filing Date: 5 March 1998 (05.03.98) (30) Priority Data: 971142 18 March 1997 (18.03.97) FI (71) Applicant (for all designated States except US): NOKIA TELECOMMUNICATIONS OY [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI). (72) Inventors; and (75) Inventors/Applicants (for US only): SUUTARI, Jyrki [FI/FI]; Laurinkuja 2 B 10, FIN-90420 Oulu (FI). LALLUKKA, Toivo [FI/FI]; Ketarakuja 3 D 24, FIN-90650 Oulu (FI). RUKAJÄRVI, Arto [FI/FI]; Pikku-Öörmintie 8, FIN-90460 Oulunsalo (FI). LIINAMAA, Olli [FI/FI]; Kannuskuja 2 B 1, FIN-90540 Oulu (FI). (74) Agent: PAPULA REIN LAHTELA OY; Fredrikinkatu 61 A, P.O. Box 981, FIN-00101 Helsinki (FI).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the</i> <i>claims and to be republished in the event of the receipt of</i> <i>amendments.</i>
(54) Title: PROCEDURE FOR ENSURING THE OPERATION OF SIGNALLING CHANNELS IN A V5 INTERFACE <div style="text-align: center;"> </div> (57) Abstract <p>The present invention relates to a procedure for ensuring the operation of signalling channels in a V5 interface between a local exchange (LE) and an access node (AN), said interface comprising at least two links (L), in conjunction with redefinition of the interface composition. Redefinition generally involves making changes in the V5 interface data, such as the location of signalling channels on the links. According to the invention, the operation of protected channels in conjunction with restarting is ensured by starting the protected channels on the channels defined for them in the new composition and/or on the channels to which they were transferred in conjunction with the protection switch-over.</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

PROCEDURE FOR ENSURING THE OPERATION OF SIGNALLING CHANNELS IN A V5 INTERFACE

The present invention relates to a procedure
5 as defined in the preamble of claim 1 for ensuring the operation of protected signalling channels in a V5 interface between a local exchange and an access node in conjunction with a redefinition of the composition of the interface.

10 Open interfaces (V5.1 and V5.2) between an access node and a local exchange are defined in the ETSI (European Telecommunications and Standards Institute) standards of the ETS 300 324 and ETS 300 347 series. V5 interfaces enable subscribers belonging to a
15 physically separate local network to be connected to a telephone exchange using a standard interface. In the present application, V5 interface expressly refers to a dynamic concentrator interface (V5.2) as defined in the ETS 300 347 standard series, consisting of one or
20 more (1 - 16) PCM (Pulse Code Modulation) cables. One PCM cable comprises 32 channels, each of which with a transfer rate of 64 kbit/s, i.e. 2048 kbit/s in all. The V5.2 interface supports analogue telephones as used in the public telephone network, digital, such as
25 ISDN (Integrated Services Digital Network) basic and system subscriber connections as well as other analogue or digital terminal equipment based on semi-fixed connections.

Certain time slots in the V5 interface, which
30 form a channel called C-channel, serve to transmit the protocols used for controlling the interface itself and the calls transmitted over the interface. A C-channel or a 64 kbit/s time slot reserved for this purpose serves to transmit information that may belong
35 e.g. to the Control protocol, Link control protocol, Protection protocol or BCC protocol of the V5 interface, or which may consist of PSTN signalling or ISDN

data. Further, according to the standards mentioned above, a C-channel can be reserved for time slots 16, 15 and/or 31 in the PCM line or V5 interface link. Especially in a V5.2 interface, the system automatically
5 creates C-channels for the critical protocols (Control, Link control, BCC and Protection), whereas the operator can place the PSTN signalling as desired, either in the same channel with the critical protocols or in another C-channel. In addition, the operator may
10 allocate a maximum of three signalling channels as so-called backup channels. These channels are resorted to in the case of a failure of the link to which the channels were originally allocated. In a V5.2 interface having more than one 2-Mbit/s link, a link whose
15 physical C-channel in time slot 16 transmits the Control, Link control, BCC and Protection protocols is defined as the primary link. Further, a link whose physical C-channel in time slot 16 only transmits the Protection protocol is a secondary link.

20 The above-mentioned standards define two different ways of changing the data for a V5 interface already activated. Changing the data means e.g. that a signalling channel is transferred to another time slot or that additional signalling channels are introduced.
25 Such changes can be effected using the so-called reprovision function defined in the standard, in which case the altered data are given a new "designation" (provision variant) at both ends, i.e. in the local exchange and in the access node. The provision variant
30 is a parameter which is checked in conjunction with the start-up of the V5 interface. This verification serves to ensure that both the local exchange and the access node observe the same composition in the V5 interface. Composition means in the first place the locations and order of the signalling channels. When the
35 parameter in question is assigned a new value, this means that e.g. the signalling channels have a new lo-

cation. When the changes are activated at both ends, i.e. when the interface is started up, the hardware first ensures via signalling that the new value of the "provision variant" is known at both ends, whereupon
5 the changes of composition or configuration are made independently according to the parameter in question. However, it is also possible to make changes in the V5 interface without using the reprovision function. In this case, the changes are made independently at both
10 ends without altering the value of the provision variant parameter. When the changes are activated, the defined changes are made automatically at both ends and the interface is started up.

The locations of the signalling channels in
15 an active interface may change in consequence of a protection switch-over of a signalling channel. This creates a situation where the interface configuration is no longer consistent with the configuration originally defined by the operator. The problem is that the
20 above-mentioned standards do not define whether the possible protection switch-over cases should be taken into account or not when a new configuration or composition is introduced. Further, when the composition of the interface is being defined, it must also be taken
25 into account that one of the links may have been damaged and that consequently the signalling channels transmitted via that link are switched over to another link. Figures 1a and 1b present an example of such a situation. Fig. 1a illustrates normal operation between a local exchange LE and an access node AN. In
30 this V5 interface, the signalling channel, which may be e.g. the BCC protocol, has been allocated to the topmost link in the V5 interface. Further, a backup channel has been allocated to the bottommost link in the interface. Fig. 1b illustrates an example situation where the backup channel and signalling channel are
35

swapped, i.e. the signalling channel is switched over to the backup channel when the link is damaged.

The object of the present invention is to eliminate the problems described above. A specific object of the present invention is to present a new procedure that makes it possible to flexibly ensure the activation of the signalling channels in a V5 interface when a new composition is defined for the V5 interface without the reprovision function.

10 In the procedure of the invention, in a V5 interface between a local exchange and an access node, said interface comprising at least two links, to ensure the operation of the signalling channels in conjunction with a redefinition of the interface composition,
15 tion, in which redefinition changes are made in the V5 interface data, such as the placement of signalling channels on the links, according to the invention, the operation of protected channels is ensured in conjunction with restarting by activating the protected
20 channels on the channels defined for them in the new composition and/or on the channels to which they were transferred in conjunction with the protection switch-over. The redefinition of the V5 interface composition is preferably carried out independently both in the
25 local exchange and in the access node without changing the value of the interface composition parameter.

In an embodiment of the invention, the channels transferred to a backup channel in conjunction with protection switch-over are left at the locations
30 to which they were transferred in conjunction with the switch-over, regardless of the redefined composition of the V5 interface.

In an embodiment of the invention, changes in conjunction with a redefinition of the composition of
35 a V5 interface are made in the original composition regardless of protection switch-over operations carried out in the V5 interface.

In the following, the invention will be described by the aid of a preferred embodiment by referring to the attached drawings, in which

Fig. 1a represents a V5 interface according
5 to the invention;

Fig. 1b represents a functional state of the V5 interface in Fig. 1a;

Fig. 2b represents a functional state according to the present invention; and

10 Fig. 2b represents another functional state according to the present invention.

Figures 1a and 1b present a V5 interface according to the invention between a local exchange LE and an access node AN. In Fig. 1a, a signalling channel
15 has been configured to use the topmost link in the V5 interface. Further, a backup channel to which one of the signalling channels can be switched over has been configured to be carried by the bottom link. In Fig. 1b, a switch-over of the signalling channel to
20 the backup channel is carried out due to malfunction of the top link, in other words, the signalling channel originally allocated to the top link is transferred to the bottom link in place of the backup channel.

Fig. 2 illustrates a solution according to
25 the invention for ensuring the activation of the signalling channels when a new V5 interface composition is defined without using the reprovision function. In the solution presented in Fig. 2, when a backup configuration is introduced, protection switch-overs of
30 signalling channels carried out previously in the interface are taken into account. In practice, this means that the signalling channels already switched over as illustrated by Fig. 2a are left at the locations to which they have been transferred in consequence of
35 protection switch-over, in this case on the lowest link, and not at the locations where they were placed in the original configuration. Further, in Fig. 2a a

redefinition has been performed in which it has been decided that the original backup channel, which has been on the lowest link as shown in Fig. 1a, shall be removed. The system removes it based on the situation after the switch-over, so in this case the backup channel is removed from the physical location that in the operator's original composition contained a signalling channel (from the top link). Fig. 2b illustrates another solution according to the invention for ensuring the activation of signalling channels. In the arrangement presented in Fig. 2b, the changes are made in the composition originally created in the system by the operator, without taking into account any protection switch-overs carried out before. Thus, in a situation as illustrated by Fig. 2b, the system removes the signalling channel from the physical location where the operator had originally placed it, in this case from the lowest link.

The invention is not restricted to the examples of its embodiments described above, but many variations are possible within the scope of the inventive idea defined by the claims.

CLAIMS

1. Procedure for ensuring the operation of signalling channels in a V5 interface between a local
5 exchange (LE) and an access node (AN), said interface comprising at least two links (L), in conjunction with redefinition of the interface composition, in which redefinition changes are made in the V5 interface data, such as the location of signalling channels on the
10 links, characterised in that the operation of protected channels in conjunction with restarting is ensured by starting the protected channels on the channels defined for them in the new composition and/or on the channels to which they were transferred
15 in conjunction with the protection switch-over.





2. Procedure as defined in claim 1, characterised in that the redefinition of the V5 interface composition is carried out independently both in the local exchange (LE) and in the access node
20 (AN) without changing the value of the interface composition parameter.

3. Procedure as defined in claim 1 or 2, characterised in that the channels transferred to a backup channel in conjunction with protection
25 switch-over are left at the locations to which they were transferred in conjunction with the switch-over, regardless of the redefined composition of the V5 interface.

4. Procedure as defined in claim 1 or 2,
30 characterised in that composition changes in conjunction with the redefinition of the composition of the V5 interface are made in the original composition regardless of protection switch-over operations carried out in the V5 interface.

35 5. Procedure as defined in any one of the preceding claims 1 - 4, characterised in that the interface composition parameter is a provision va-

riant parameter of the V5 interface as defined by the V5 specifications.

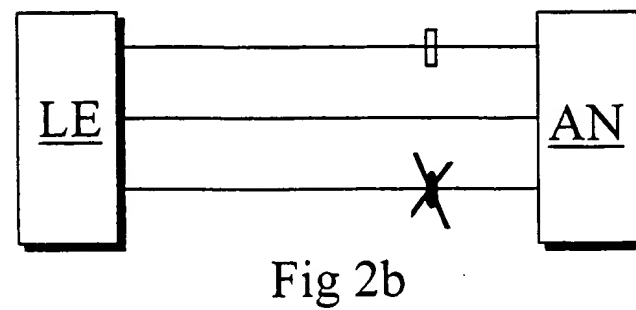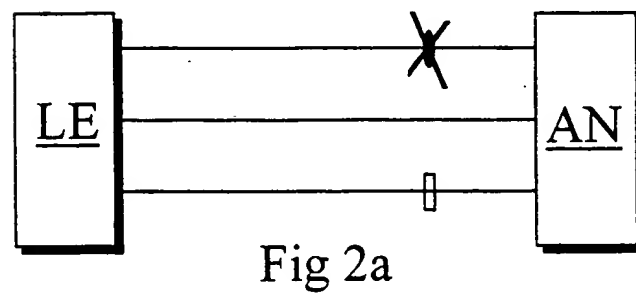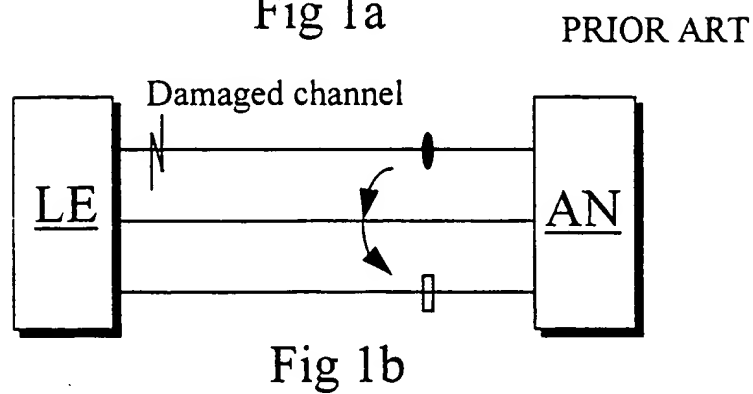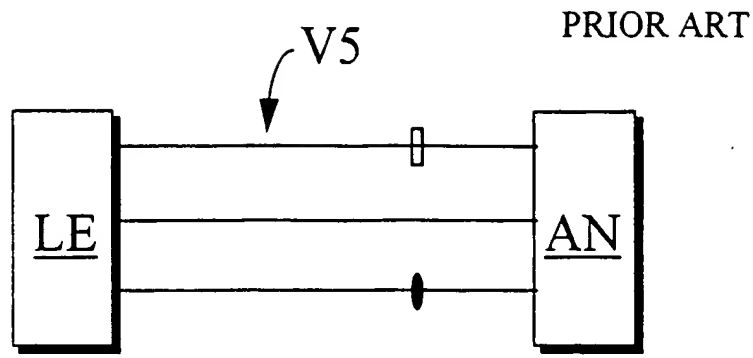

● = backup
channel
(standby)

□ = signalling
channel

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 98/00198

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: H04Q 3/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	Karim Khakzar, "V5 Interfaces between Digital Local Exchanges and Access Networks", 1994, Frequenz, (Berlin), page 44 - page 50 --	1-5
A	IEEE Global Telecommunication Conference, Volume 3, December 1992, (USA), Dr. Alex Gillespie, "INTERFACING ACCESS NETWORKS TO EXCHANGES THE ETSI V5 APPROACH" page 1754 - page 1758 --	1-5
P,A	WO 9735404 A1 (TELEFONAKTIEBOLAGET LM ERICSSON), 25 Sept 1997 (25.09.97), see the whole document -----	1-5

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

2 Sept 1998

Date of mailing of the international search report

04 -09- 1998

Name and mailing address of the ISA/

Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Cecilia Sandell
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

Information on patent family members

27/07/98

International application No.

PCT/FI 98/00198

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9735404 A1	25/09/97	AU 2185897 A	10/10/97
		SE 506729 C	02/02/98
		SE 9601047 A	20/09/97
